

3XR 2.5 Stainless steel body drilling pump



Application

- Pumping for drilling, well, tank
- For domestic (watering, irrigation) or industrial applications

Pompe


- Maximum liquid temperature: +35°C
- Maximum sand content: 0,25%
- Maximum immersion depth: 80 m
- Minimum borehole diameter: 3"
- Curved tolerance in accordance with the standard ISO 9906

Moteur

- Rewindable motor

Identification codes

3 XR m 2.5 /11 -0.25

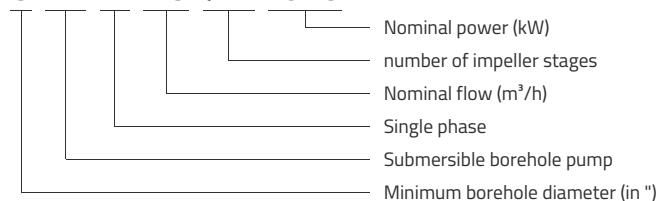

Technical data

MODEL	kW	Q (m ³ /h)		0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.3	3.6
		Q (l/min)	0	5	10	15	20	25	30	35	40	45	50	55	60	
3XRm2.5/11-0.37	0.37	44	43	43	42	41	39	37	35	32	29	24	18	11		
3XR2.5/11-0.37	0.37	44	43	43	42	41	39	37	35	32	29	24	18	11		
3XRm2.5/16-0.55	0.55	64	63	62	61	59	57	54	51	47	42	35	27	16		
3XR2.5/16-0.55	0.55	64	63	62	61	59	57	54	51	47	42	35	27	16		
3XRm2.5/21-0.75	0.75	84	83	82	80	78	75	72	68	62	56	46	35	21		
3XR2.5/21-0.75	0.75	84	83	82	80	78	75	72	68	62	56	46	35	21		
3XRm2.5/31-1.1	1.1	124	122	121	118	115	111	106	100	91	82	68	52	31		
3XR2.5/31-1.1	1.1	124	122	121	118	115	111	106	100	91	82	68	52	31		
3XR2.5/37-1.5	1.5	148	146	144	141	137	132	126	119	109	98	81	62	37		
3XRm2.5/37-1.5	1.5	148	146	144	141	137	132	126	119	109	98	81	62	37		
3XRm2.5/8-0.25	0.25	32	32	31	30	30	29	27	26	24	21	18	13	8		
3XR2.5/8-0.25	0.25	32	32	31	30	30	29	27	26	24	21	18	13	8		

Dimensions

MODEL	DN1	DN2	P	M	T	poidsP	poidsM	poidsT
3XRm2.5/11-0.37	1	1½	483	338	821	2.1	5.6	7.7
3XR2.5/11-0.37	1	1½	483	308	791	2.1	4.8	6.9
3XRm2.5/16-0.55	1	1½	613	368	981	2.5	6.4	8.9
3XR2.5/16-0.55	1	1½	613	338	951	2.5	5.6	8.1
3XRm2.5/21-0.75	1	1½	768	408	1176	3.2	7.5	10.7
3XR2.5/21-0.75	1	1½	768	368	1136	3.2	6.4	9.6
3XRm2.5/31-1.1	1	1½	1029	493	1522	4.1	10	14.1
3XR2.5/31-1.1	1	1½	1029	448	1477	4.1	8.7	12.8
3XR2.5/37-1.5	1	1½	1209	493	1702	4.7	10	14.7
3XRm2.5/37-1.5	1	1½	1209	543	1752	4.7	11.3	16
3XRm2.5/8-0.25	1	1½	405	308	713	1.8	4.8	6.6
3XR2.5/8-0.25	1	1½	405	288	693	1.8	4	5.8

Hydraulic performance

