

4XR 4 Stainless steel body drilling pump



Application

- Pumping for drilling, well, tank
- For domestic (watering, irrigation) or industrial applications


Pompe

- Maximum liquid temperature: +35°C
- Maximum sand content: 0,25%
- Maximum immersion depth: 80 m
- Minimum borehole diameter: 3"
- Curved tolerance in accordance with the standard ISO 9906

Moteur

- Rewindable motor

Identification codes

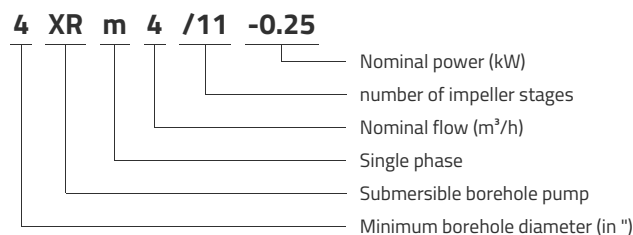

Technical data

MODEL	kW	Q (m ³ /h)	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4	6
		Q (l/min)	0	10	20	30	40	50	60	70	80	90	100
4XRm4/10-0.75	0.75	73	70	69	67	65	61	55	48	41	32	23	
4XR4/10-0.75	0.75	73	70	69	67	65	61	55	48	41	32	23	
4XRm4/14-1.1	1.1	102	98	96	94	91	85	77	68	57	45	32	
4XR4/14-1.1	1.1	102	98	96	94	91	85	77	68	57	45	32	
4XRm4/18-1.5	1.5	131	127	124	121	117	109	99	87	73	58	41	
4XR4/18-1.5	1.5	131	127	124	121	117	109	99	87	73	58	41	
4XRm4/24-2.2	2.2	174	169	165	161	156	146	132	116	98	77	55	
4XR4/24-2.2	2.2	174	169	165	161	156	146	132	116	98	77	55	
4XR4/32-3	3	232	225	220	215	208	195	176	155	130	103	73	
4XR4/40-4	3	290	281	275	268	260	243	220	194	163	128	92	
4XR4/50-5.5	5.5	363	352	344	335	325	304	275	242	203	160	115	
4XRm4/6-0.37	0.37	44	42	41	40	39	36	33	29	24	19	14	
4XR4/6-0.37	0.37	44	42	41	40	39	36	33	29	24	19	14	
4XR4/62-7.5	7.5	450	436	426	416	403	377	341	300	252	199	142	
4XRm4/8-0.55	0.55	58	56	55	54	52	49	44	39	33	26	18	
4XR4/8-0.55	0.55	58	56	55	54	52	49	44	39	33	26	18	

Dimensions

MODEL	DN1	DN2	P	M	T	poidsP	poidsM	poidsT
4XRm4/10-0.75	1½	1½	513	359	872	4.3	8.7	13
4XR4/10-0.75	1½	1½	513	344	857	4.3	8	12.3
4XRm4/14-1.1	1½	1½	630	399	1029	5.3	10.6	15.9
4XR4/14-1.1	1½	1½	630	379	1009	5.3	9.8	15.1
4XRm4/18-1.5	1½	1½	778	449	1227	6.4	12.9	19.3
4XR4/18-1.5	1½	1½	778	424	1202	6.4	11.7	18.1
4XRm4/24-2.2	1½	1½	953	542	1495	8.1	17.7	25.8
4XR4/24-2.2	1½	1½	953	514	1467	8.1	15.7	23.8
4XR4/32-3	1½	1½	1187	594	1781	10.2	19.8	30
4XR4/40-4	1½	1½	1452	698	2150	12.4	23.7	36.1
4XR4/50-5.5	1½	1½	1744	788	2532	15.1	28	43.1
4XRm4/6-0.37	1½	1½	396	314	710	3.2	6.7	9.9
4XR4/6-0.37	1½	1½	396	314	710	3.2	6.7	9.9
4XR4/62-7.5	1½	1½	2126	908	3034	18.4	34	52.4
4XRm4/8-0.55	1½	1½	454	329	783	3.7	6.3	11
4XR4/8-0.55	1½	1½	454	329	783	3.7	6.3	11